

# E451-0.125

## HIGH EFFICIENCY TOILET FLUSH VALVE (0.125 gpf / 0.5 Lpf per Flush)

### EMPIRE

#### Description

Exposed chrome plated flush valve for floor mounted or wall hung top spud urinals.

#### Flush Cycle

0.125 gpf / 0.5Lpf High Efficiency


#### Specification

Chrome plated closet flush valve for left or right hand supply with the following features.

- Chloramine resistant Self Cleaning Piston.
- 1" vandle resistant capped screwdriver angle stop with back-check.
- Sweat adapter kit.
- ADA compliant metal "Rubberflex" oscillating handle.
- Slip-Joint adjustable tailpiece.
- 0.75" x 9" vacuum breaker flush connection.
- Wall flange, spud nut and spud flange for 1.5" top spud.
- All rubber parts molded of chloramine resistant rubber

#### Variations

- AM - Antimicrobial Coated Handle
- SM - SideArm (Side Mounted Sensor Actuator)
- T6 - Wall flange with allen set screw
- T36 - Solid ring wall support for flush connection
- T46 - Split ring wall support for flush connection
- TS - TruStop - Ball valve designed Control Stop
- VPS - Vandal Proof Control Stop with Key

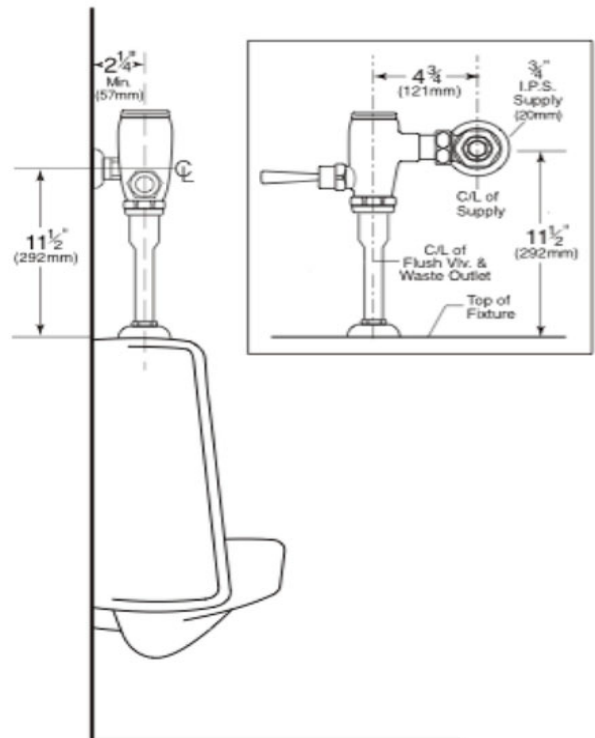

ASSE 1037

